

ICI-DP HH500-15 set



Delivery content

- | | |
|--------------------|----------------------------|
| 1x ICI-DP HH500-15 | 1x BPS 204 |
| 1x BPS 204-Client | 1x HV FI-FI mini 1 m, 高压电缆 |
| 1x SK FI-FI 7P 1 m | 4x SMA-SSMB 1 m |
| 1x NT FRI EU 24V | 1x USB-AB |
| 1x ICI-DP case | 1x ICI-DP m |
| 1x BPS 204 m | |

Technical parameters


| | |
|--------------------------|---------------|
| 探头尺寸 | Ø 500 µm |
| 脉冲参数 | |
| 上升时间 | 2 ns |
| | 25 ns (200 V) |
| 极性 (set by software) | +/- |
| 电压 | 50 - 1000 V |
| max. Jitter (typ.) | ± 1 ns |
| Min. trigger pulse delay | 35 ns |

ICI-DP HH500-15 set

Contents of the case ICI-DP HH500-15 set




Schematic set-up with mover

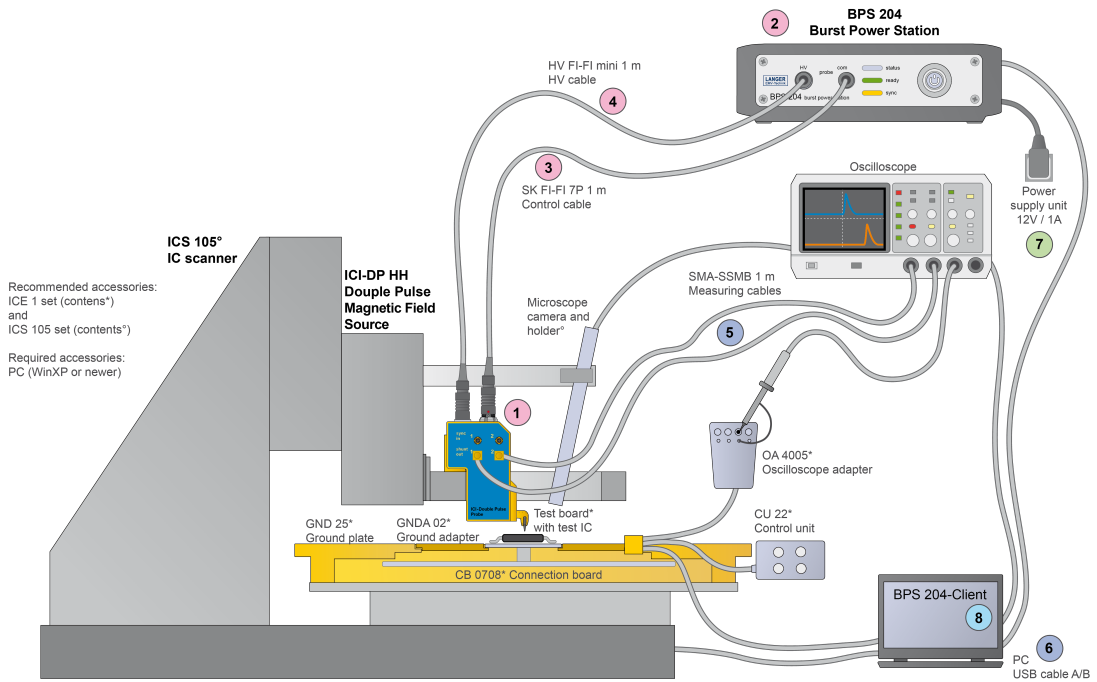

ICI-DP HH500-15 set

Fault injection measuring station with Langer IC scanner

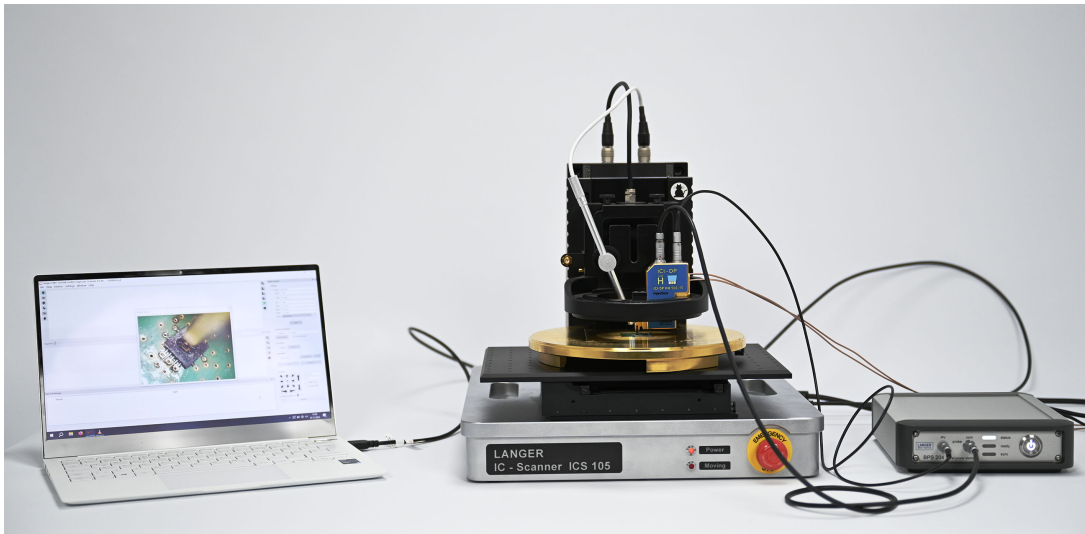

Scope of delivery

