


Short description

该场源面积较大，能够大范围地向机箱表面，连接件，带导体结构的模块以及集成电路（如总线系统，液晶显示器）等施加耦合干扰电场。该场源的尖端部位，也可用于定位对电场敏感的较小结构（导线，晶振，上拉电阻，IC等）。

The field source is powered by an EFT/burst generator or TS 23 Pulse Generator. The generator is connected to the 4.4 kV, high voltage resistant SMB plug of the field source via a high-voltage cable (HV SMB 1 m, SMB-BNC 1 m, or GK 0.7 m SMB-SMB).

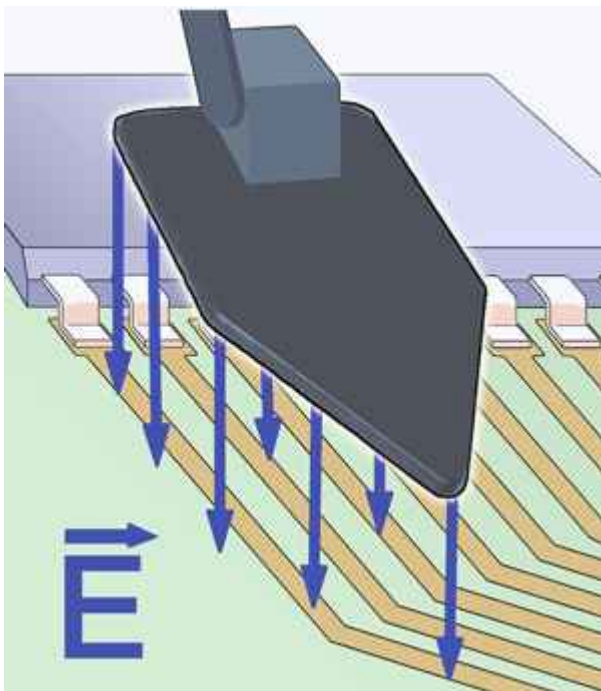

ES 02-h 电场源

Application with ES 02



ES 02-h

