

# ICI-DP HH150-15




# ICI-DP HH150-15

## Technical parameters


|   |   |
|---|---|
| 探头尺寸  | Ø 150 µm  |
| 脉冲参数  |   |
|   | 1000 V  |
| 上升时间  | 2 ns  |
| 最大脉冲电流                                      | 16 A  |
| 脉冲宽度  | 10 ns   |
|   | 25 ns   |
| 重复频率  | 0.1 Hz - 15 kHz (single pulse, < 500 V)<br>0.1 Hz - 7.5 kHz (double pulse, < 500 V) |
| 极性 (set by software)                        | + / - ( no polarity change within a double pulse)                                   |
| Min. trigger pulse delay                    | 35 ns   |
| Additional trigger pulse delay (Delay-Line) | Controlled by BPS 204 supply  |
| 电源电压  | BPS 204   |
| 重量  | 190 g   |
| 尺寸 (L x W x H)                              | (26 x 54 x 71) mm   |

## Application of ICI-DP double pulse magnetic field source

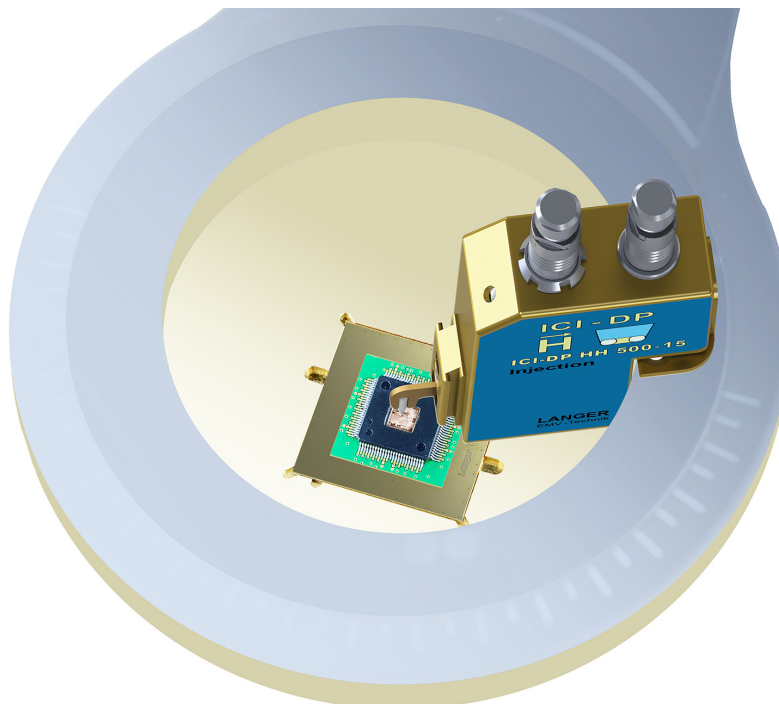

# ICI-DP HH150-15

Probe with connections

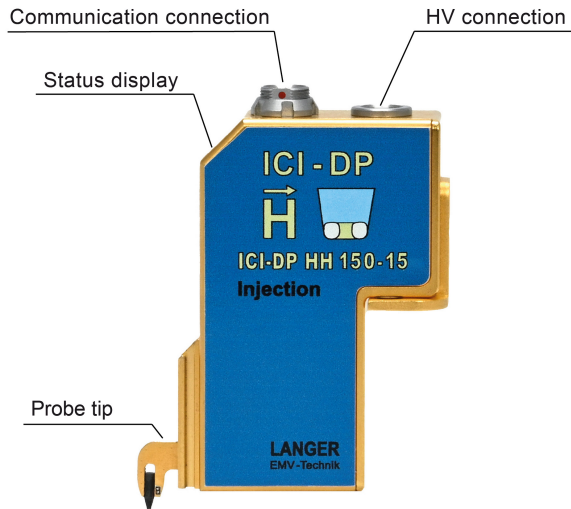

Probe with protection cap - rear view

