


Technical parameters

探头尺寸	Ø 500 µm
脉冲参数	
上升时间	2 ns
	25 ns (200 V)
极性 (set by software)	+/-
电压	50 - 1000 V
max. Jitter (typ.)	± 1 ns
Min. trigger pulse delay	35 ns


Contents of the case ICI-DP HH500-15 set



Schematic set-up with mover

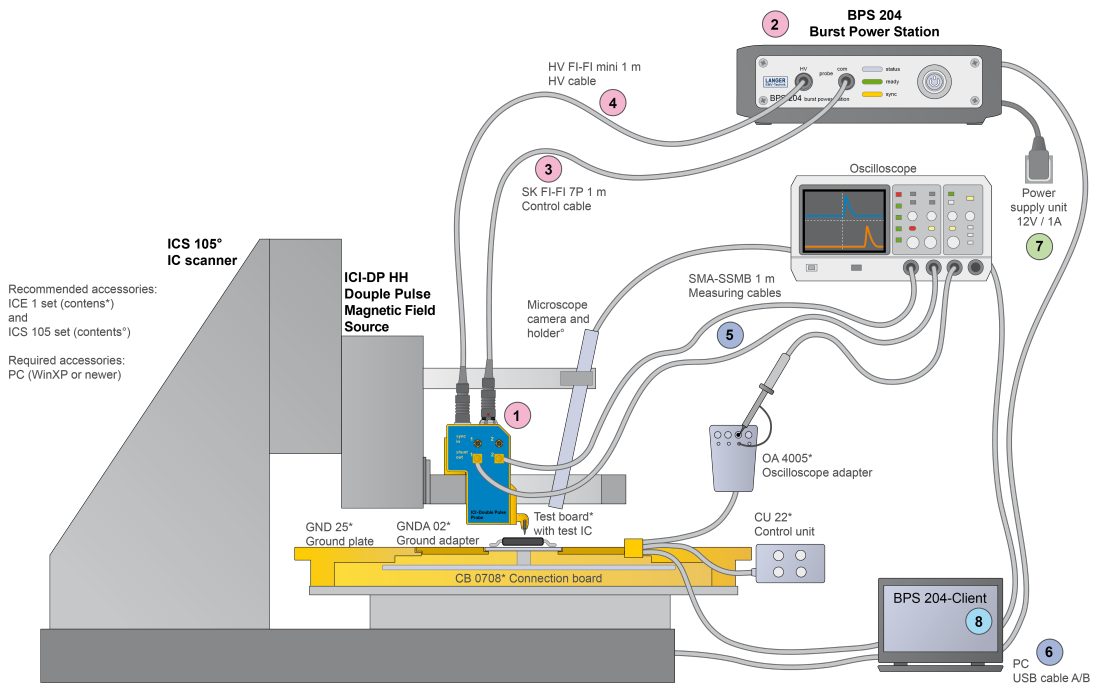

Fault injection measuring station with Langer IC scanner

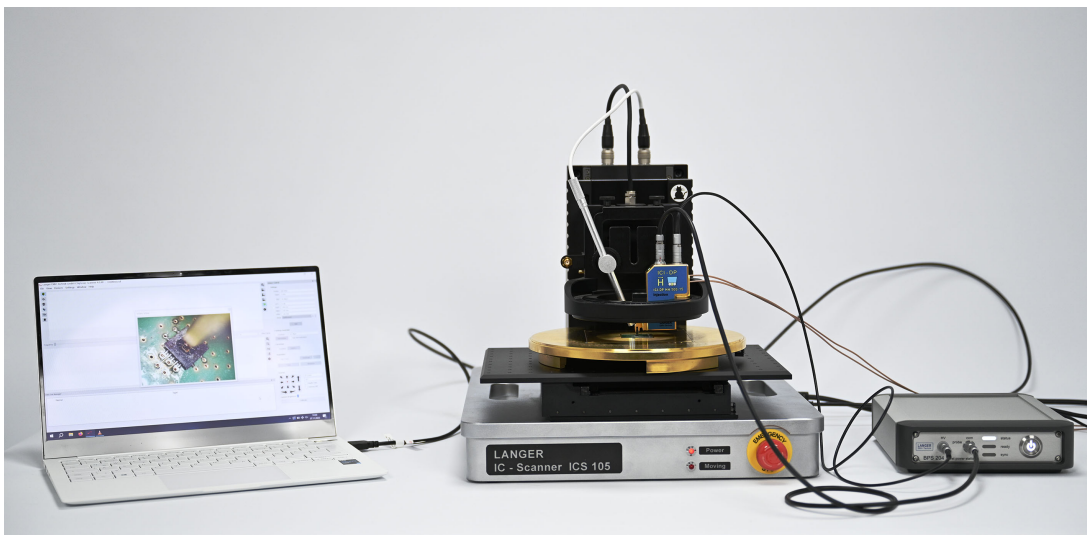

Scope of delivery

