

PA 303 BNC

前置放大器 (100KHz-3GHz)



Short description


PA 303用于放大测试信号，譬如高分辨率近场探头的微弱信号。PA 303的输入输出端口采用50Ω BNC连接器 (PA 303BNC)，SMA型连接器 (PA 303 SMA) 或者N型连接器 (PA 303 N)。

The PA 303 is connected to the 50 ohm input of a spectrum analyzer or an oscilloscope. The power plug ensures the supply of PA 303. The near-field probe is connected via the respective cable to the input of the preamplifier.

Technical parameters

| | |
|----------------|-------------------|
| 频率范围 | 100 kHz - 3 GHz |
| 放大 | 30 dB |
| 1分贝压缩点 | 10 dBm |
| 噪声系数 | 4.5 dB |
| 电源电压 | 12 V DC |
| 电流输入 | 75 mA |
| 最大输入功率 | +13 dBm |
| 重量 | 40 g |
| 尺寸 (L x W x H) | (50 x 38 x 13) mm |

频率特性

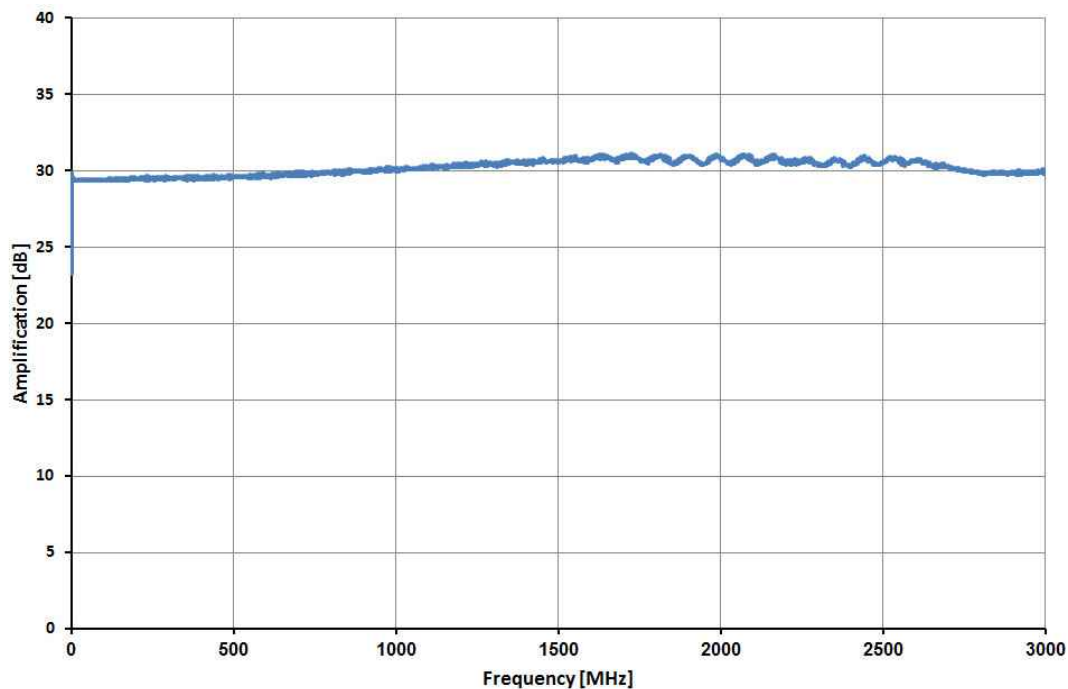

频率特性 (细节)

