


PA 303 SMA

前置放大器 (100KHz-3GHz)

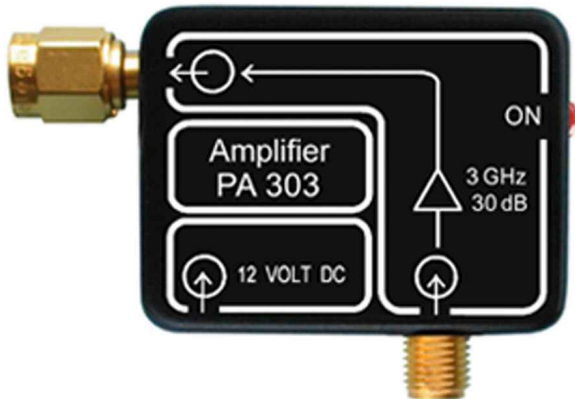

Short description

PA 303用于放大测试信号，譬如高分辨率近场探头的微弱信号。PA 303的输入输出端口采用50Ω BNC连接器 (PA 303BNC)，SMA型连接器 (PA 303 SMA) 或者N型连接器 (PA 303 N)。

PA 303 is connected to the 50 ohm input of a spectrum analyzer or an oscilloscope. The power plug ensures the power supply of the PA 303. The near-field probe is connected via the respective cable to the input of the preamplifier.


Technical parameters

频率范围	100 kHz - 3 GHz
放大	30 dB
1分贝压缩点	10 dBm
噪声系数	4.5 dB
电源电压	12 V DC
电流输入	75 mA
最大输入功率	+13 dBm
重量	35 g
尺寸 (L x W x H)	(50 x 38 x 13) mm

PA 303 SMA

前置放大器 (100KHz-3GHz)

频率特性

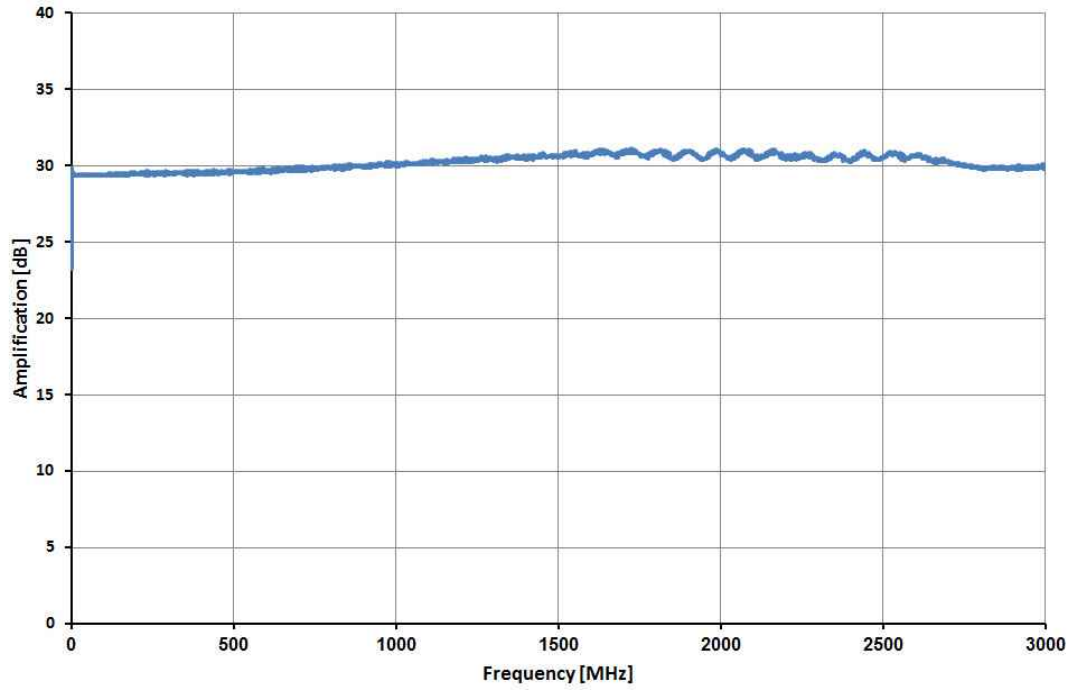

频率特性 (细节)

