

# RF-R 400-1

磁场探头 (30MHz-3GHz)



## Short description


RF-R 400-1型磁场探头，由于其直径较大（25mm），因而灵敏度很高，适合在10cm以内的距离检测模块和设备。

The RF-R 400-1 is a passive near-field probe. In principle it has the same structure as the probes RF-R 50-1 and RF-R 3-2. The near-field probe is small and handy. It has a current attenuating sheath and, therefore, is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50  $\Omega$  input. The H-field probe does not have an internal terminating resistance of 50  $\Omega$ .

## Technical parameters

|      |                             |
|------|-----------------------------|
| 频率范围 | 30 MHz ... 3 GHz            |
| 探头尺寸 | $\varnothing \approx 25$ mm |
| 输出接口 | SMB, male, jack             |
| 重量   | 15 g                        |


频率特性 [dB $\mu$ V] / [dB $\mu$ A/m]

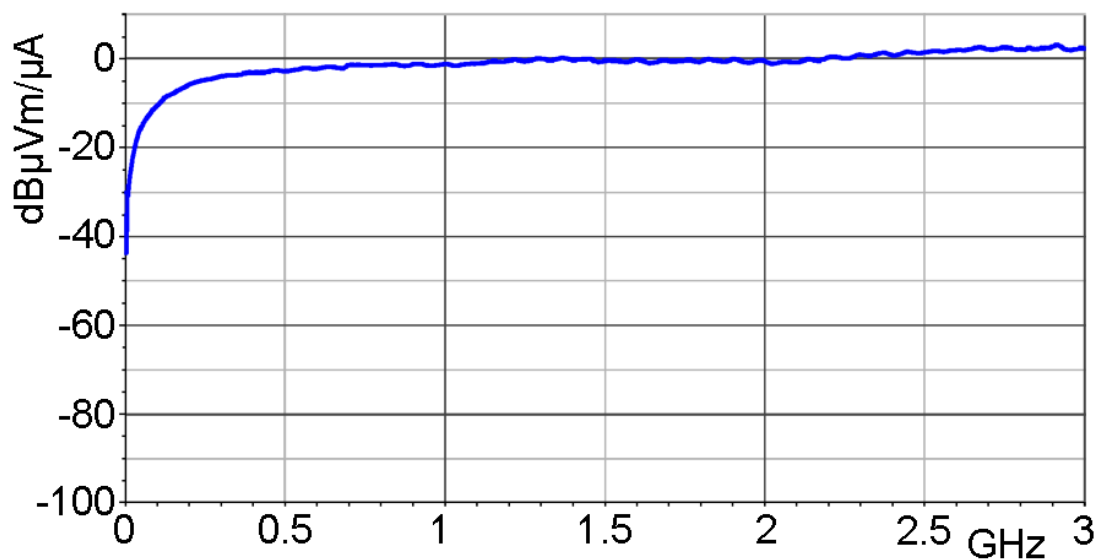


# RF-R 400-1

磁场探头 (30MHz-3GHz)

磁场校正曲线 [dB $\mu$ A/m] / [dB $\mu$ V]

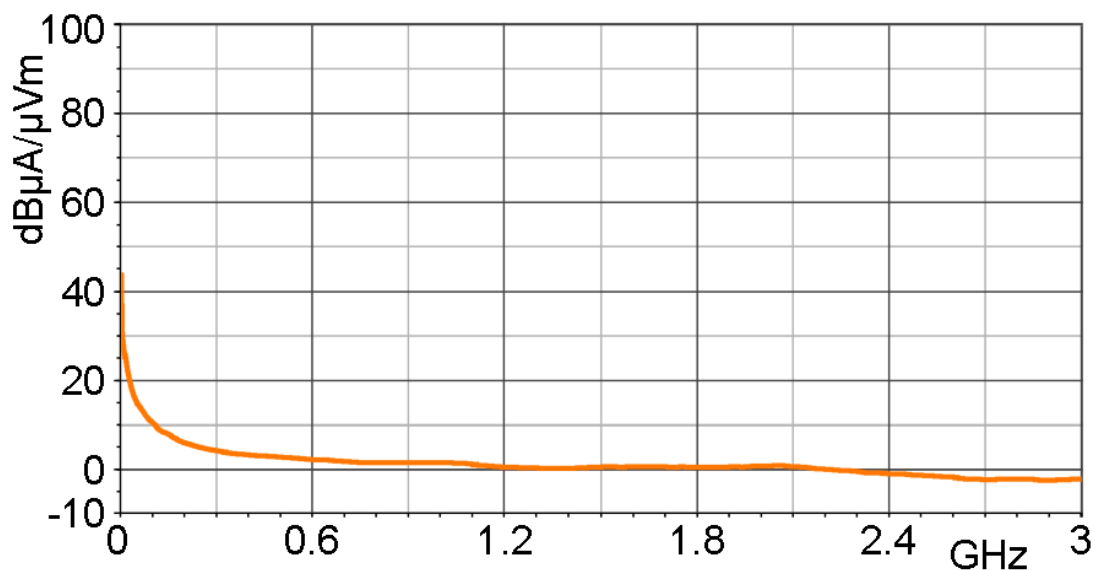

电流校正曲线 [dB $\mu$ A] / [dB $\mu$ V]

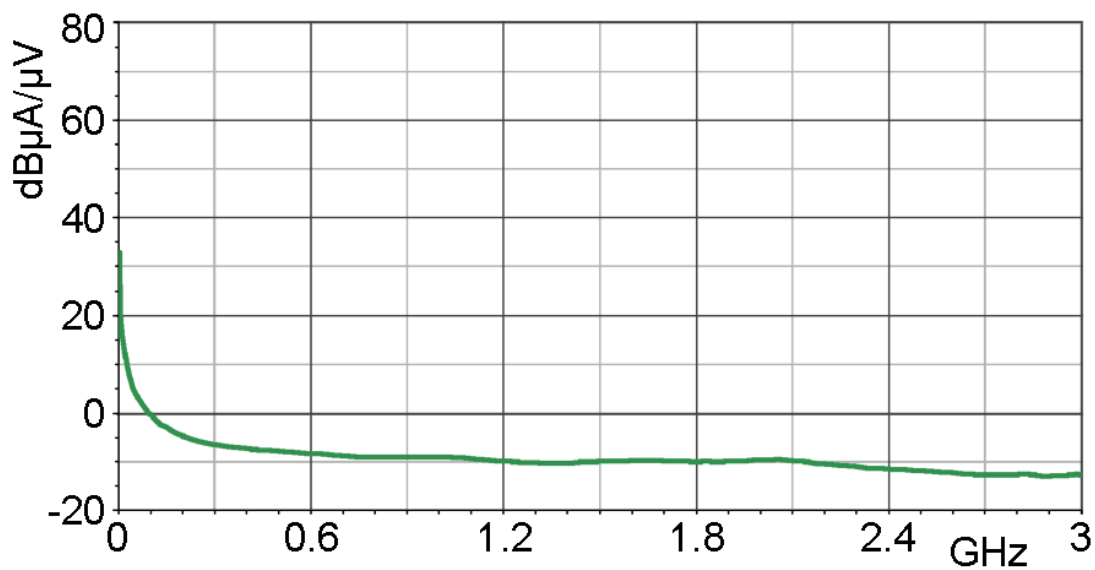

# RF-R 400-1

磁场探头 (30MHz-3GHz)



Probe head

