


Short description

The BS 05DU generates a magnetic field in millimeter range. It functions like a coupling clamp and is used for selective coupling of disturbance current in single conducting paths, IC pins, SMD components and thin cables (flat ribbon cables).

Measuring principles

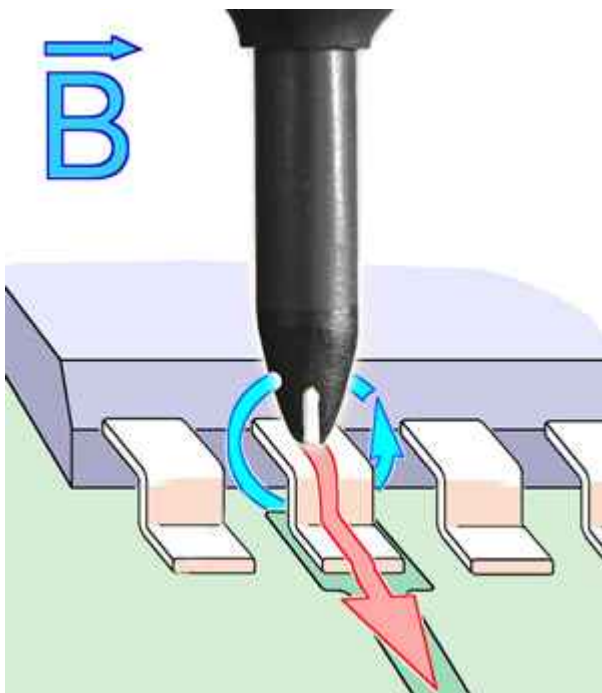

BS 05DU

Magnetic Field Source

Application BS 05DU

