

# RF-U 2.5-2

磁场探头 (30MHz-3GHz)



## Short description

RF-U 2.5-2型磁场探头是一个近场探头，用于检测导线、元件引脚、SMD组件和集成电路引脚中的射频电流。这个探头顶端有一个约0.5mm宽的磁场敏感缺口，测试时将这个缺口放在被测对象上。

The RF-U 2.5-2 is a passive near-field probe that functions like the RF-U 5-2 probe, but is designed for SMD components (pins). The near-field probe is small and handy. It has a current attenuating sheath and its upper side is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50  $\Omega$  input. The H-field probe does not have an internal terminating resistance of 50  $\Omega$ .


## Technical parameters

频率范围	30 MHz ... 3 GHz
分辨率	$\approx 0.5$ mm
探头尺寸	$\varnothing \approx 4$ mm
输出接口	SMB, male, jack
重量	15 g

# RF-U 2.5-2

磁场探头 (30MHz-3GHz)



频率特性 [dB $\mu$ V] / [dB $\mu$ A/m]

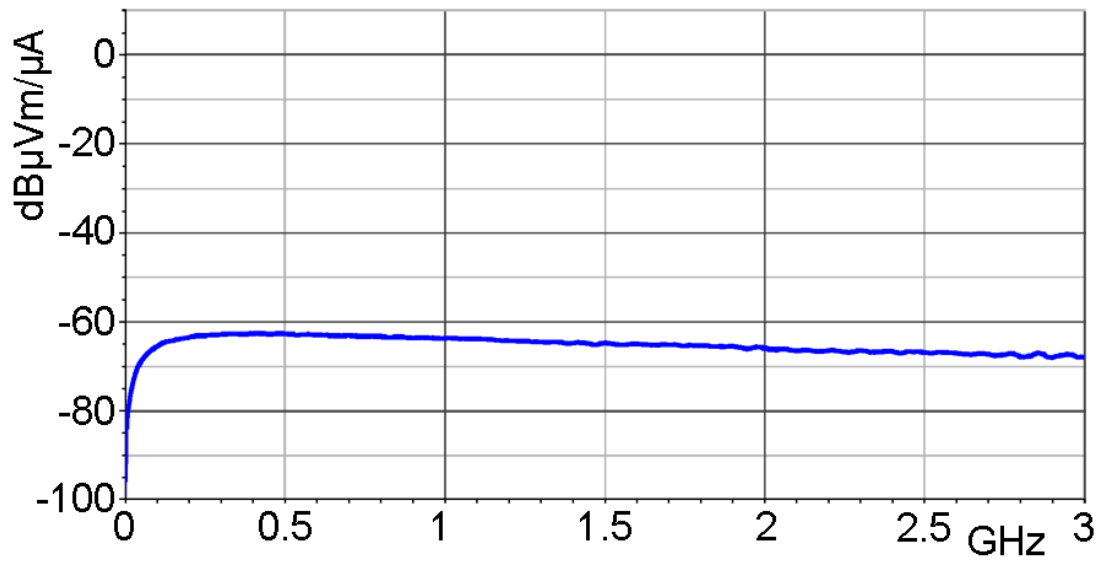

磁场校正曲线 [dB $\mu$ A/m] / [dB $\mu$ V]



电流校正曲线 [dB $\mu$ A] / [dB $\mu$ V]

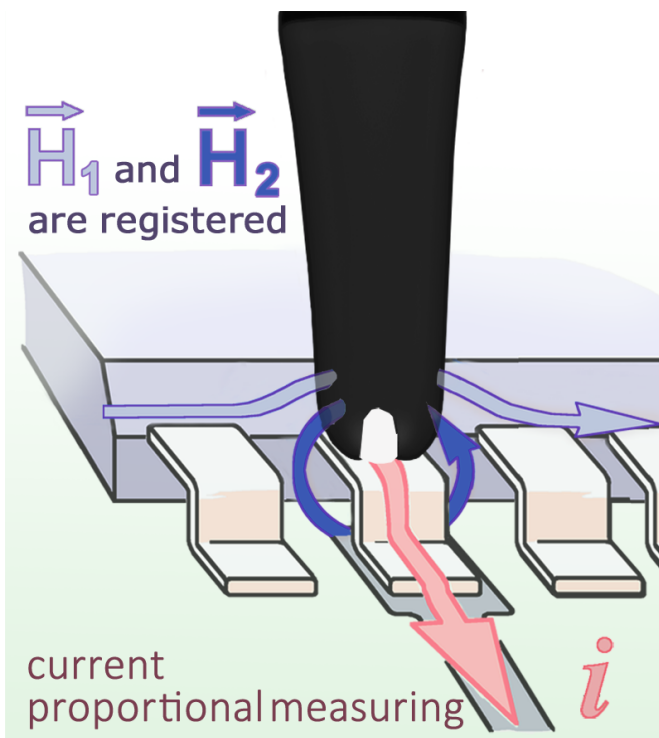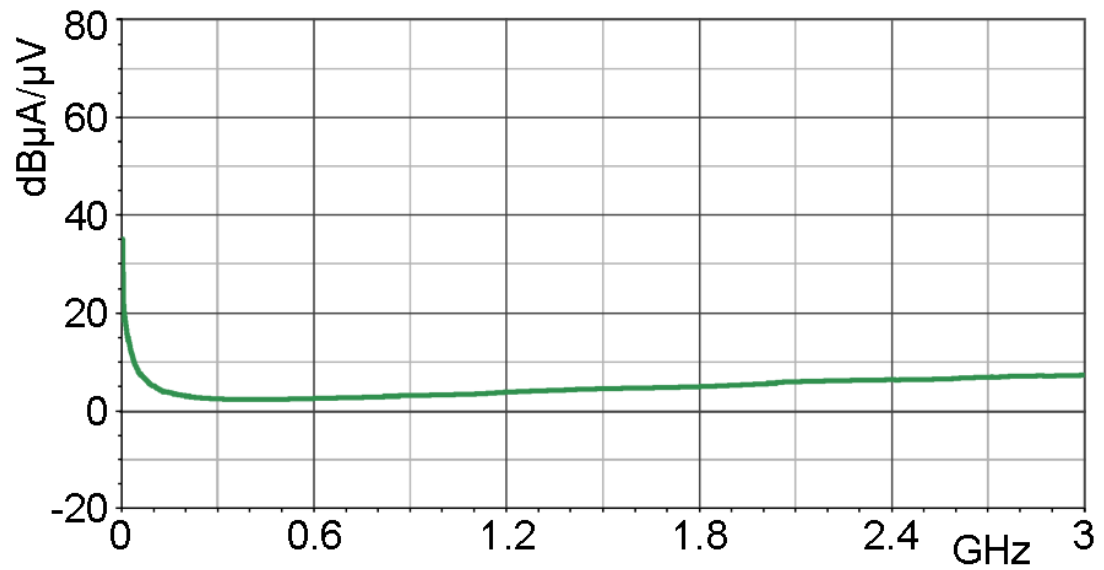

# RF-U 2.5-2

磁场探头 (30MHz-3GHz)

Probe head

